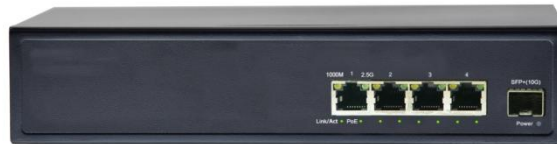

2.5G Connected to the 10 Gbit/s upstream dump switch

Model: SZ5204-ACB



Product overview and features:

SZ5204-ACB is a layer 2 Ethernet switch, which can meet the needs of cost-effective 2.5G access and 10 Gigabit uplink for enterprise networks and operator customers. SZ5204-ACB uses a high-performance low-power network processor, provides Gigabit line-speed forwarding performance, support Flexible forwarding strategy. The switch can be widely used in security network video surveillance, hotels, campuses, and network engineering of small and medium-sized enterprises.

Product Feature:

- 4 * 2.5 G RJ45 port +1* 10 G SFP ports
- Support IEEE 802.3、 IEEE802.3u、 IEEE 802.3ab、 IEEE 802.3bz、 IEEE 802.3ae、 IEEE 802.3x
- Ethernet port support 10/100/1000 m / 2.5 G adaptive
- Supports automatic port rollover (Auto MDI/MDIX)
- Panel indicators monitor working status and assist in fault analysis
- Flow control mode, full duplex adopts IEEE802.3x standard, half duplex adopts Backpressure standard

-
- Support lightning protection: common mode 6KV; Electrostatic air 8KV, contact 6KV

Hardware specifications:

| 项目 | SZ5204-ACB |
|--------------------------|--|
| Port | 4*10/100/1000/2500M Base-T, 1*1000M Base-X SFP/10GE SFP+ |
| Exchange capacity | 40Gbps |
| Packet forwarding rate | 29.76Mbps |
| MAC | 4K |
| Multicast | 4K |
| power | AC: 100 ~ 240V 47/63Hz; DC: 12V ~ 75V; |
| Power consumption | ≤24W |
| Dimensions | 230*148*44mm |
| (Width * height * depth) | Working Temperature: -10°C ~ 55°C |
| Environment temperature | Storage temperature: -40°C ~ 70°C |